

### 1~8 Channels Video Converter User's Manual

1~8 Channel Video Digital Optical Converter

User's Manual



## PRODUCT OVERVIEW

Our 1-8 channel video digital optical converter adopt the advanced international digital video and optical fiber transmission technology, and implement the transmission of real-time & synchronization, no-distortion and high quality to 1-8 channel video signal on the single-core optical fiber. 1-8 channel video digital optical converter adopt the full digital video non-compression transmission technology and high quality video effect, which can meet the user's requirement: the plug-and-play design makes the installation more convenient and easier, the LED design helps the user to know the working status easily, and it is unnecessary to implement the spot adjustment: its optical module and core circuit adopt the imported components that have high stability, and all optical & electrical interfaces conform to the international standards, which is applied to the different working environment.



## PRODUCT CHARACTERISTICS

- 10-bit digital code and non-compression type video transmission
- Support any high-resolution video signal
- Automatic compatible PAL, NTSC and SECAM video system
- Power supply and other parameter state indication, which can monitor the operation condition of system
- Support no-damage regenerative trunk of video
- Constant input optical power, and large dynamic range, and it is unnecessary to implement the adjustment of spot electrics or optics when using
- Special ASIC design.
- Industry-grade of operating temperature from -40°C to 85°C, which is applied to the different working environment
- Hot-swap function
- Can be installed in 19 inches rack-mounted chassis(4U)



## TECHNOLOGY CHARACTERISTICS

### OPTICAL CHARACTERISTICS

Fiber connector:	FC/ST
Transmission distance:	550M-80Km
Wavelength:	1310/1550nm

### VIDEO CHARACTERISTICS

Video interface form:	BNC
Video input/output impedance:	75 $\Omega$ (imbalance)
Video input/output voltage:	1Vpp(typical value) 1.5V pp(max value)
Bandwidth of video:	5MHz-7.5MHz
Automatic compatible video system:	PAL SECAM NTSC
Differential gain:	(10%-90%APL) DG<1%(typical value)
Differential phase:	(10%-90%APL) DP<0.7°(typical value)
Weighted signal-to-noise ratio:	S/N $\geq$ 70dB

### DATA CHARACTERISTICS

Interface Port:	Industrial standard port
Interface Signal Type:	RS-232/RS-422/RS-485/Manchester
Cobc rate:	0~400Kbps
BER:	$\leq 10$

### AUDIO CHARACTERISTICS

Interface Port:	Industrial standard port
Audio input/output impedance:	600 $\Omega$ (Balance/Imbalance)
Audio input/output voltage:	2Vpp(typical value)
Audio input/output level:	0dbm(typical value)
Audio Bandwidth:	10Hz~20kHz
Audio Digital Bandwidth:	24bit
Audio signal-to-noise ratio:	S/N $\geq$ 95dB(weighted)


### SWITCHING VALUE CHARACTERISTICS

Intartace Port:	Industrial standard port
Signals input:	Alarm or switching value input, support TTL, RS-232/422/485 or switches, buttons.
Signals output:	Alarm or switching value output, support TTL, RS-232/422/485 or Contact Relay output


### OTHER NORMAL CHARACTERISTICS

Operating Temperature:	-40℃ ~ +85℃
Humidity:	0~95% non-condensing
Operating Voltage:	DC 5V/2A
MTBF:	≥10 <sup>6</sup> hours


### TABLE OF FRONTPANEL

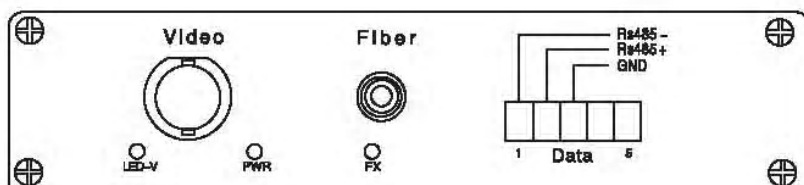

1 Channel

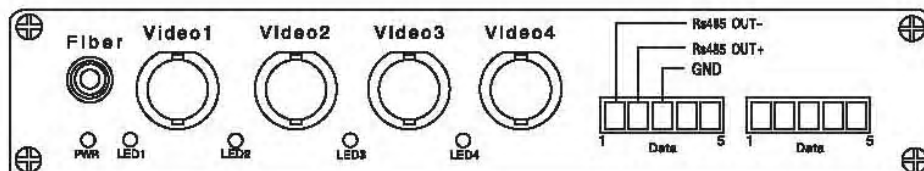

4 Channel

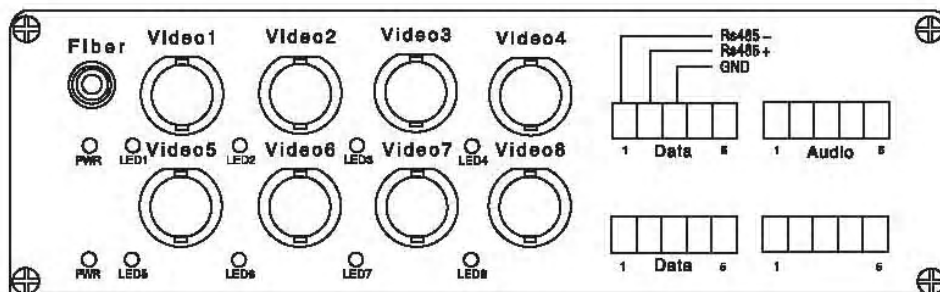

8Channel

**LED lamps**

<b>PWR:</b>	LED lamp for power supply (when turn the power on, this lamp will be solid on, when shut down the power, this lamp will be off.)
<b>FX:</b>	LED for fiber port (when get optical signals, this led will be on green)
<b>LED-V1~n</b>	LED for video (when get video signals, this led will be on green)
<b>LED-D</b>	LED for Data (when get data signals, this led will be blink)
<b>LED-A</b>	LED for Audio (when get audio signals, this led will be blink)


 **INSTALLATION****1、NOTE BEFORE INSTALLATION**

- (1) When you unpack this product package, you will find the items listed below: 1pc optical transmitter; 1pc optical receiver; 2pcs power adaptors (no this item when user prepare power supply by themselves.), 1pc user's manual copy. Please inspect the contents, and report any apparent damage or missing items immediately to your authorized reseller.
- (2) Please read this manual carefully before installation.
- (3) Please read the manual for safely-using carefully.
- (4) Do not try to dismantle the equipment without authorization from us.
- (5) Please check the labels of item number on the equipment carefully (By 'T' it means optical transmitter, by 'R' it means optical receiver.)
- (6) The optical transmitter is the device to change video signals, audio signals or data signals into optical signals and then transmit with optical fiber. So this equipment should be connected to camera with rotate-operation device or other video options.
- (7) The optical receiver is the device to receive optical signals and then change them into video signals, audio signals or data signals. So this equipment should be connected to monitor or monitor-matrix.
- (8) The video interface of optical transmitter has corresponding video interface of the optical receiver.

**2、INSTALLATION STEPS**

- (1) Connect the video interface of optical transmitter to camera with rotate-operation device or other video options. Then connect the optical fiber to the fiber port, and connect the power supply.
- (2) Connect the video interface of optical receiver to monitor or monitor-matrix. Then connect the optical fiber to the fiber port, and connect the power supply.

### 3、NETWORKING SCHEME

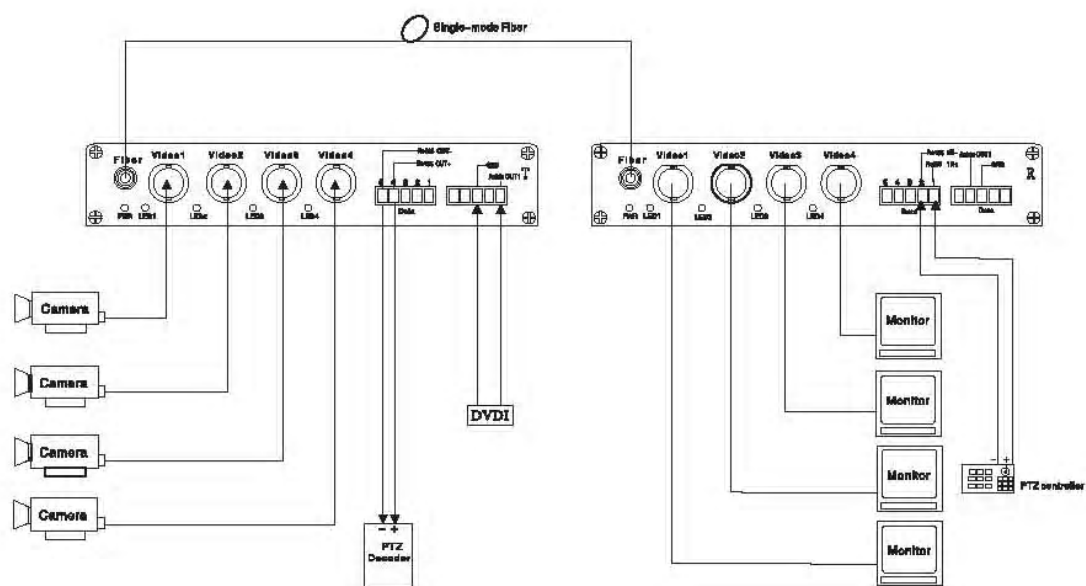

1~8 channel is same



### MANUAL FOR SAFELY USING



**BE CAREFUL!**

WARNING THIS LABEL REMINDS YOU THIS EQUIPMENT MAY DO HARM TO YOU



**TAKE CARE OF ELECTRIC SHOCK!**

WARNING THIS LABEL REMINDS YOU THIS EQUIPMENT MAY DO HARM TO YOU OR YOUR PROPERTY

### **MANUALFOR SAFELY-USING**

In order to prevent any damages to the property of you or others, do please follow the manual for safely using. Although this equipment is designed reliably and safely, please try your best to prevent any damages to it.

- 1、 Please read this manual carefully and keep it well for your further information.
- 2、 Please place the equipment where it will not be subjected to extreme temperatures or humidity as this equipment is electric device.
- 3、 DO not try to knot the cables of power supply or put anything on them please place them where it will not be touched easily.
- 4、 Please make sure the connections between power plug and other devices are fully valid.
- 5、 Please follow the marks on the equipment when connect the power supply, and the power supply should meet the following rules.
  - (1) Input AC: 220V(165V-260V), 50Hz  
Input DC: -48V, -24V, -12V
  - (2) Output DC: 5V, 2A

(Remark: This equipment can be used with standard power adaptor only)
- 6、 Please shut down the power supply immediately and get in touch with us or your authorized reseller when the following things happen:
  - (1) The equipment is drowned in water or another liquid.
  - (2) The equipment or the coat is broken down
  - (3) The equipment works abnormally
  - (4) The equipment is smelled or noisy or smoky
- 7、 DO not try to maintain the equipment by yourself, unless there are clear instructions in this manual
- 8、 Please install special device to prevent damages caused by lightning when use the equipment in open outdoor.