

## T-XENPAK-DWDM-40KM

### 10Gbps XENPAK DWDM Transceiver 40KM

#### Features

XENPAK MSA Compliant  
 70-PIN Connector  
 SC duplex receptacle package  
 Wavelength selectable to C-band ITU-T grid wavelengths  
 Cooled EA-DFB/PIN-PD  
 Power Supply: +5.0V,+3.3V, APS:+1.2V  
 Power Dissipation 4W Maximum  
 0°C to 70°C Operating Case Temperature  
 Digital Diagnostic Monitoring  
 Management and control with MDIO 2 wire bus  
 XAUI electrical interface 4X3.125Gb/s Ethernet  
 ≤40km ER ( Extended Range ) 10GBE  
 RoHS compliant

#### Applications

10Gb/s Ethernet Switches and Routers  
 10GE Core-routers  
 10GE Storage  
 Other 10Gbps Ethernet Transmission System

#### Regulatory Compliance

Feature	Agency	Standard	Certificate / Comments
Laser Safety	FDA	CDRH 21 CFR 1040 and Laser Notice No.50	1120292-000
Product Safety	UL	UL and CUL EN60950-2:2007	E347511
Environmental Protection	SGS	RoHS Directive 2002/95/EC	GZ1001008918/CHEM
EMC	WALTEK	EN55022:2006+A1:20077 EN55024:1998+A1+A2:2003	WT10093759-D-E-E

#### Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Unit
Supply Voltage +5V	Vcc5		6.0	V
Supply Voltage _3.3V	Vcc3		4	V
Supply Voltage APS	Vaps		2	V
Storage Temperature	Tst	-20	85	°C
Optical Input Received Power	PIN		-1	dBm



## Recommended Operating Conditions

Parameter	Symbol	Min.	Typical	Max.	Unit
Operating Case Temperature	Tca	0		70	°C
Supply Voltage +5V	Vcc5	4.75	5	5.25	V
Supply Current +5V	Icc5			500	mA
Supply Voltage +3.3V	Vcc3	3.14	3.3	3.47	V
Supply Current +3.3V	Icc3			1000	mA
Supply Voltage APS	Vaps	1.14	1.2	1.26	V
Supply Current APS	Iaps			1100	mA
Module Power Dissipation	Pm			4	W

## Transmitter Specifications-Optical

Parameter	Symbol	Min.	Typical	Max.	Unit
Center Wavelength (SOL)△	$\lambda_c$	$\lambda_c - 0.05$	ITU-T Grid Wavelengths	$\lambda_c + 0.05$	nm
Center Wavelength (EOL)▲	$\lambda_c$	$\lambda_c - 0.1$	ITU-T Grid Wavelengths	$\lambda_c + 0.1$	nm
Center Wavelength Stability	$\Delta\lambda_D$	-6.5	$\lambda_c$	6.5	nm
Optical Transmit Power	Po	-1		2	dBm
Optical Transmit Power(disable)	Ptx-dis			-40	dBm
Extinction Ratio	ER	9			dB
Side Mode Suppression Ratio	SMSR	30			dB
Eye Mask	IEEE 802.3ae Compliant				

△Laser-Start of Life

▲Laser End of life

## Receiver Specifications-Optical

Parameter	Symbol	Min.	Typical	Max.	Unit
Input Operating Wavelength	$\lambda_c$	1260		1600	nm
Average Receive Power	Pavg	-15.8		-1.0	dBm
Receiver Sensitivity in 10.3Gbps(OMA)	Rsen1			-14.1	nm
Stressed Receiver Sensitivity in 10.3Gbps(OMA)	Rsen2			-11.3	dBm
Reflectance	Rrx			-26	dB
LOS Asserted	Lsa	-28			dBm
LOS De-Asserted	Lda			-19	dBm
LOS Hysteresis	Lh	0.5			dB

[1] Measured with conformance test signal for BER = 10<sup>-12</sup>. The stressed sensitivity values in the table are for system level BER measurements which include the effects of CDR circuits. It is recommended that at least 0.4 dB additional margin be allocated if component level measurements are made without the effects of CDR circuits.

## Transmitter Specification-Electrical

Parameter	Symbol	Min.	Typ.	Max	Unit
Data Rate( TXLINE0-3)	TX-xaui		3125		Mbps
Differential Impedence	Zo	80	100	120	Ω
Differential Input Amplitude	Vin P-P	160		2000	mVpp
Input Rise/Fall	TR /TF	60		130	ps
Differential Impedence of Zin	Zin		100		ohm

## Receiver Specification-Electrical

Parameter	Symbol	Min.	Typ.	Max	Unit
Data Rate( TXLINE0-3 )	RX-xaui		3125		Mbps
Supply Voltage	VccRX	3.13	3.3	3.47	V
Differential Output Amplitude	Vout P-P	800		1600	mV
Rise / Fall Time	Tr / Tf	50		90	ps
Differential Impedence of Zout	Zout		100		ohm

## Signal Specification-Electrical

Parameter	Symbol	Min.	Typ.	Max	Unit
<b>1.2V CMOS</b>					
Input High Voltage	VIL( MAX )			0.36	V
Input Low Voltage	VIH( MIN)	0.84		1.25	V
Capacitance				320	pF
Pull Up Resistance	Rpull	10k		22k	ohm
<b>MDIO I/O</b>					
Output Low Voltage	VOL	-0.3		0.2	V
Output Low Current	IOL			4	mA
Input High Voltage	VIH	0.84		1.5	V
Input Low Voltage	VIL	-0.3		0.36	V
Pull-up Supply Voltage	VPULL	1.14	1.2	1.26	
Input Capacitance	CIN			10	Pf
Load Capacitance	CLOD			470	Pf
External Pull-up Resistance	EPULL	200			Ohm



## C-band $\lambda$ c Wavelength Guide

ITU Channel Product Code	Frequency (THz)	Wavelength	ITU Channel Product Code	Frequency (THz)	Wavelength
17	191.7	1563.86	40	194.0	1545.32
18	191.8	1563.05	41	194.1	1544.53
19	191.9	1562.23	42	194.2	1547.73
20	192.0	1561.42	43	194.3	1542.94
21	192.1	1560.61	44	194.4	1542.14
22	192.2	1559.79	45	194.5	1541.35
23	192.3	1558.98	46	194.6	1540.56
24	192.4	1558.17	47	194.7	1539.77
25	192.5	1557.36	48	194.8	1538.98
26	192.6	1556.55	49	194.9	1538.19
27	192.7	1555.75	50	195.0	1537.40
28	192.8	1554.94	51	195.1	1536.61
29	192.9	1554.13	52	195.2	1535.82
30	193.0	1553.33	53	195.3	1535.04
31	193.1	1552.52	54	195.4	1534.25
32	193.2	1551.72	55	195.5	1533.47
33	193.3	1550.92	56	195.6	1532.68
34	193.4	1550.12	57	195.7	1531.90
35	193.5	1549.32	58	195.8	1531.12
36	193.6	1548.51	59	195.9	1530.33
37	193.7	1547.72	60	196.0	1529.55
38	193.8	1546.92	61	196.1	1528.77
39	193.9	1546.12			

## Pin Definition

Pin No	Name	Dir	Function	Notes
1	GND		Electrical Ground	1
2	GND		Electrical Ground	1
3	GND		Electrical Ground	1
4	5.0V		Power	2
5	3.3V		Power	2
6	3.3V		Power	2
7	APS=1.2V		Adaptive Power Supply	2
8	APS=1.2V		Adaptive Power Supply	2

## 10Gbps XENPAK DWDM Module

9	LASI		Open Drain Compatible 10K-22K pull up on host. Logic High: Normal Operation Logic Low: LASI Asserted	4
10	RESET	I	Open Drain compatible. 10-22K pull-up on transceiver Logic high = Normal operation Logic low = Reset Minimum reset assert time 1 ms	4
11	VEND SPECIFIC		Vendor Specific Pin. Leave unconnected when not in use.	8
12	TX ON/OFF	I	Open Drain compatible. 10-22K pull-up on transceiver Logic high = Transmitter On (capable) Logic low = Transmitter Off (always)	4
13	RESERVED		Reserved	4
14	MOD DETECT	O	Pulled low inside module through 1k	
15	VEND SPECIFIC		Vendor Specific Pin. Leave unconnected when not in use.	8
16	VEND SPECIFIC		Vendor Specific Pin. Leave unconnected when not in use.	8
17	MDIO	I/O	Management Data IO	4.5
18	MDC	I	Management Data Clock	4.5
19	PRTAD4	I	Port Address Bit 4 (Low = 0)	4
20	PRTAD3	I	Port Address Bit 3 (Low = 0)	4
21	PRTAD2	I	Port Address Bit 2 (Low = 0)	4
22	PRTAD1	I	Port Address Bit 1 (Low = 0)	4
23	PRTAD0	I	Port Address Bit 0 (Low = 0)	4
24	VEND SPECIFIC		Vendor Specific Pin. Leave unconnected when not in use.	8
25	APS SET		Feedback input for APS	
26	RESERVED		Reserved for Avalanche Photodiode use.	8
27	APS SENSE		APS Sense Connection	
28	APS=1.2V		Adaptive Power Supply	2
29	APS=1.2V		Adaptive Power Supply	2
30	3.3V		Power	2
31	3.3V		Power	2
32	5.0V		Power	2
33	GND		Electrical Ground	1

34	GND		Electrical Ground	1
35	GND		Electrical Ground	1
36	GND		Electrical Ground	1
37	GND		Electrical Ground	1
38	RESERVED		Reserved	
39	RESERVED		Reserved	
40	GND		Electrical Ground	1
41	RX LANE0+	O	Module XAUI Output Lane 0+	7
42	RX LANE0-	O	Module XAUI Output Lane 0-	7
43	GND		Electrical Ground	1
44	RX LANE1+	O	Module XAUI Output Lane 1+	7
45	RX LANE1-	O	Module XAUI Output Lane 1-	7
46	GND		Electrical Ground	1
47	RX LANE2+	O	Module XAUI Output Lane 2+	7
48	RX LANE2-	O	Module XAUI Output Lane 2-	7
49	GND		Electrical Ground	1
50	RX LANE3+	O	Module XAUI Output Lane 3+	7
51	RX LANE3-	O	Module XAUI Output Lane 3-	7
52	GND		Electrical Ground	1
53	GND		Electrical Ground	1
54	GND		Electrical Ground	1
55	TX LANE 0+	I	Module XAUI Input Lane 0+	7
56	TX LANE 0-	I	Module XAUI Input Lane 0-	7
57	GND		Electrical Ground	1
58	TX LANE 1+	I	Module XAUI Input Lane 1+	7
59	TX LANE 1-	I	Module XAUI Input Lane 1-	7
60	GND		Electrical Ground	1
61	TX LANE2+	I	Module XAUI Input Lane 2+	7
62	TX LANE2-	I	Module XAUI Input Lane 2-	7
63	GND		Electrical Ground	1
64	TX LANE3+	I	Module XAUI Input Lane 3+	7
65	TX LANE3-	I	Module XAUI Input Lane 3-	7
66	GND		Electrical Ground	1
67	RESERVED		Reserved	
68	RESERVED		Reserved	
69	GND		Electrical Ground	1
70	GND		Electrical Ground	1

**Notes:**


- 1) Ground connections are common for TX and RX.
- 2) All connector contacts are rated at 0.5A nominal.
- 4) 1.2V CMOS compatible.
- 5) MDIO and MDC timing must comply with IEEE802.3ae, Clause 45.3



7) XAUI output characteristics should comply with IEEE802.3ae Clause 47.

8) Transceivers will be MSA compliant when no signals are present on the vendor specific pins.

### Functional Diagram of Typical XENPAK Style Transceiver

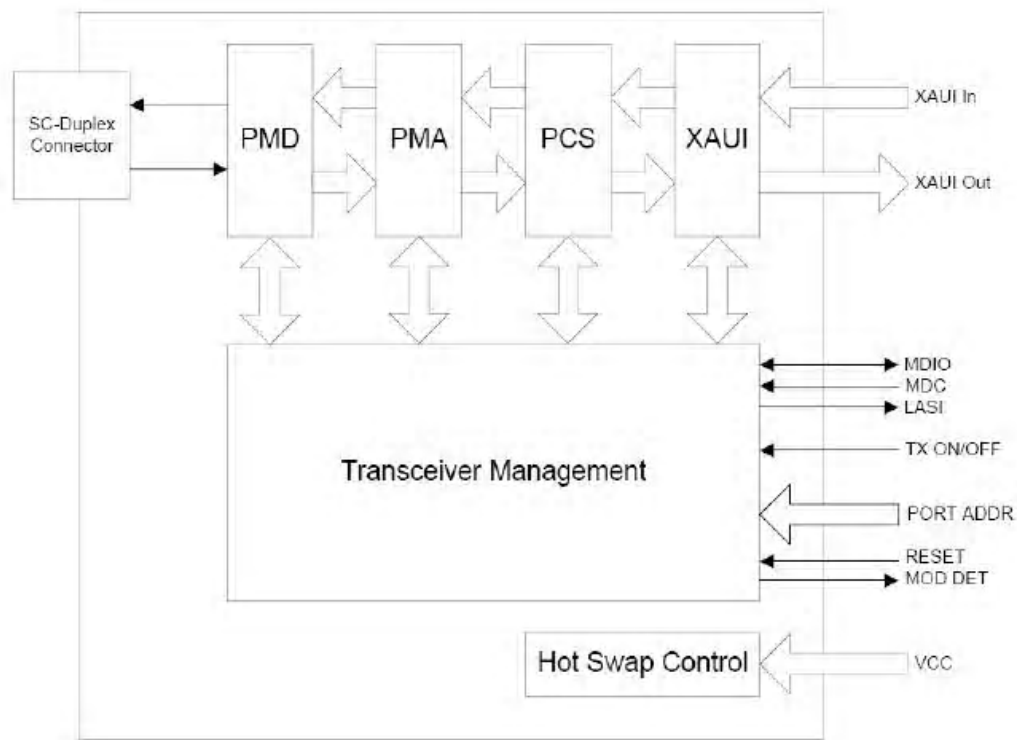


**Electrical Pin-out Details**

70	GND	1	GND
69	GND	2	GND
68	RESERVED	3	GND
67	RESERVED	4	5.0V
66	GND	5	3.3V
65	TX LANE3-	6	3.3V
64	TX LANE3+	7	APS
63	GND	8	APS
62	TX LANE2-	9	LASI
61	TX LANE2+	10	RESET
60	GND	11	VEND SPECIFIC
59	TX LANE1-	12	TX ON/OFF
58	TX LANE1+	13	RESERVED
57	GND	14	MOD DETECT
56	TX LANE0-	15	VEND SPECIFIC
55	TX LANE0+	16	VEND SPECIFIC
54	GND	17	MDIO
53	GND	18	MDC
52	GND	19	PRTAD4
51	RX LANE3-	20	PRTAD3
50	RX LANE3+	21	PRTAD2
49	GND	22	PRTAD1
48	RX LANE2-	23	PRTAD0
47	RX LANE2+	24	VEND SPECIFIC
46	GND	25	APS SET
45	RX LANE1-	26	RESERVED
44	RX LANE1+	27	APS SENSE
43	GND	28	APS
42	RX LANE0-	29	APS
41	RX LANE0+	30	3.3V
40	GND	31	3.3V
39	RESERVED	32	5.0V
38	RESERVED	33	GND
37	GND	34	GND
36	GND	35	GND

Toward Bezel



## Mechanical Specifications

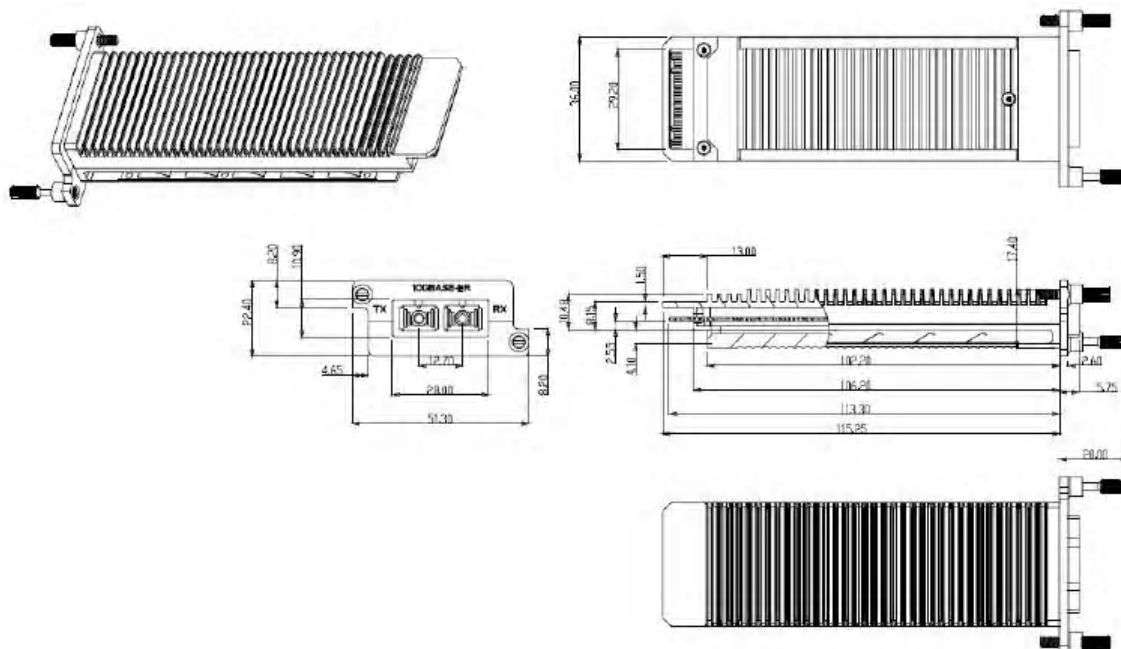

## Ordering information

Part Number	Product Description
T-XENPAK-DWDM-40KM	9.95~10.3Gbps DWDM XENPAK 40km -5℃~+70℃ (1470~1610nm)

## Notice:

T-TECH reserves the right to make changes to or discontinue any optical link product or service identified in this publication, without notice, in order to improve design and/or performance. Applications that are described herein for any of the optical link products are for illustrative purposes only. T-TECH makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

## Contact

E-mail:sales@t-techvip.com

<http://www.t-techvip.com>