

T-10G-RJ45

10Gbps-T Copper SFP Transceiver



Features

- Supports Links up to 30m using Cat 6a/7 Cable
- SFF-8431 and SFF-8432 MSA Compliant
- IEEE 802.3az Compliant
- Low Power Consumption (2.5W max @ 30m)
- Fast Retrain EMI Cancellation Algorithm
- Low EMI Emissions
- I2C 2 Wire Serial Interface for Serial Id and Phy Registers
- Auto-negotiates with other 10GBase-T-NC PHYs
- Automatic Detection and Correction of Wiring and Polarity Swaps
- Robust Die Cast Housing
- Bail Latch Style ejector mechanism
- Unshielded and Shielded cable support

Description

The T-TECH T-10G-RJ45 copper transceiver module is a high performance integrated duplex data link for bi-directional communication over copper cable. It is specifically designed for high speed communication links that require 10Gigabit Ethernet over Cat 6a/7 cable. This is the first SFP+ transceiver that offers 10Gb/s communication over this type of media.

General Specification

Parameter	Symbol	Min	Typ	Max	Unit	Remarks
Bit Error Rate	BER			10^{-12}		
Operating Temperature	T_{op}	-5		85	°C	Case temperature
Storage Temperature	T_{sto}	- 40		85	°C	Ambient temperature
Operating Humidity	-	5		95	%	Non condensing
Power @30m	I_s		2.3	2.5	W	
Input Voltage	V_{cc}	3	3.3	3.6	V	



Pin Assignment

<i>PIN #</i>	<i>Symbol</i>	<i>Description</i>
1	V _{EET}	Transmitter ground (common with receiver ground)
2	T _{FAULT}	Transmitter Fault.
3	T _{DIS}	Transmitter Disable. Laser output disable on high or open
4	SDA	Data line for serial ID
5	SCL	Clock line for serial ID
6	MOD_ABS	Module Absent. Grounded within the module
7	RS0	No connection required
8	LOS	Loss of Signal indication. Logic 0 indicates normal operation
9	RS1	No connection required
10	V _{EEER}	Receiver ground (common with transmitter ground)
11	V _{EEER}	Receiver ground (common with transmitter ground)
12	RD ⁻	Receiver Inverted DATA out. AC coupled
13	RD ⁺	Receiver Non-inverted DATA out. AC coupled
14	V _{EEER}	Receiver ground (common with transmitter ground)
15	V _{CCR}	Receiver power supply
16	V _{CCT}	Transmitter power supply
17	V _{EET}	Transmitter ground (common with receiver ground)
18	TD ⁺	Transmitter Non-Inverted DATA in. AC coupled
19	TD ⁻	Transmitter Inverted DATA in. AC coupled
20	V _{EET}	Transmitter ground (common with receiver ground)


Note:

1. IEEE standard 802.3ae. IEEE Standard Department, 2005.
2. Enhanced 8.5 and 10 Gigabit Small Form Factor Pluggable Module "SFP+" – SFF-8431
3. Digital Diagnostics Monitoring Interface for Optical Transceivers – SFF-8472.

Electrical Pad Layout

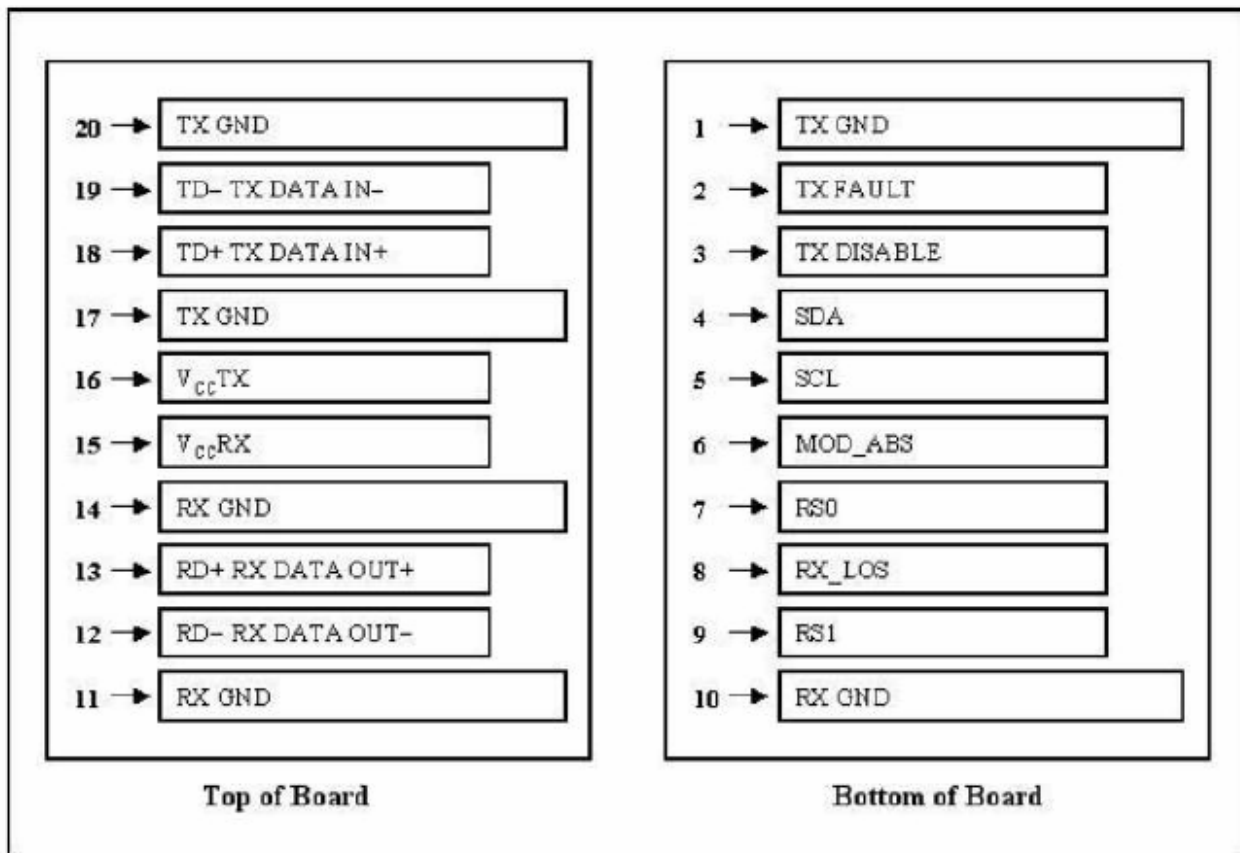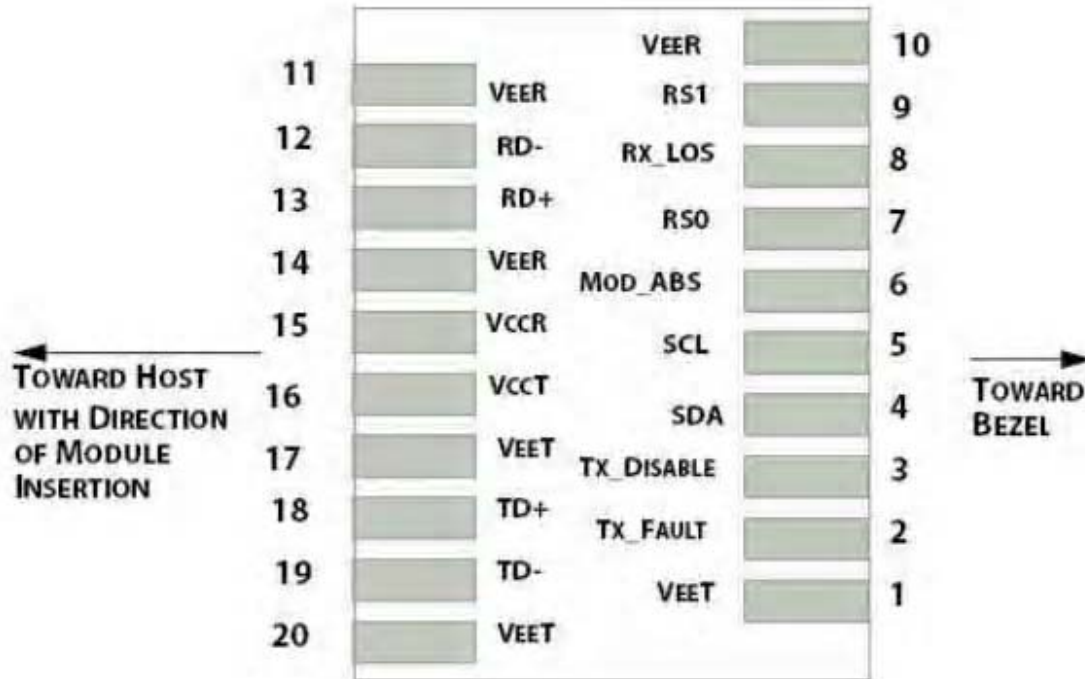

Mechanical Specifications

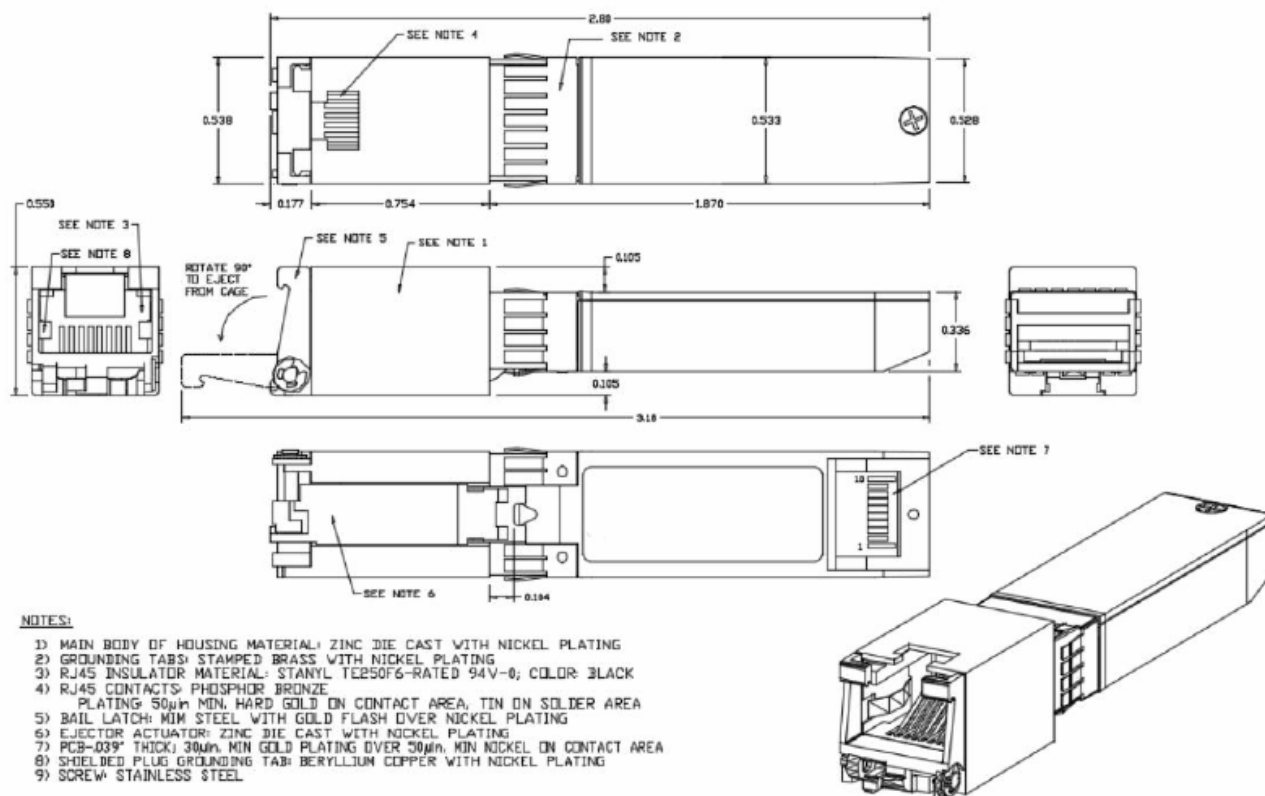

Ordering information

T-10G-RJ45	10Gbps	Copper	0-70C	30m	RJ45
------------	--------	--------	-------	-----	------

Notice:

T-TECH reserves the right to make changes to or discontinue any optical link product or service identified in this publication, without notice, in order to improve design and/or performance. Applications that are described herein for any of the optical link products are for illustrative purposes only. T-TECH makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Contact:

E-mail: sales@t-techvip.com

<http://www.t-techvip.com>